

03-16-00

A

03/15/00
1c777 U.S. PTO

1c571 U.S. PTO
09/526091

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	<i>Title of Invention</i>	OPTICAL NETWORKING ASSEMBLY
	<i>Named Inventor(s)</i>	Michael L. Wach
	<i>Attorney Docket</i>	06948.105009
	<i>Express Mail Label No.</i>	EE859733759US

APPLICATION ELEMENTS	ADDRESS TO: Assistant Commissioner of Patents Box Patent Application Washington, D.C. 20231
1. <input type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)	8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))
2. <input checked="" type="checkbox"/> Specification, Claims, and Abstract Total Pages 29	9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney by assignee
3. <input checked="" type="checkbox"/> Drawings Total Sheets 13	10. <input type="checkbox"/> English Translation Document (if applicable)
4. Oath or Declaration Total Pages 1 a. <input checked="" type="checkbox"/> Newly unexecuted (original or copy) b. <input type="checkbox"/> Copy from prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 Below] (i) <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).	11. <input type="checkbox"/> Information Disclosure Statement (IDS) PTO-1449 <input type="checkbox"/> Copies of IDS Citations
5. <input type="checkbox"/> Incorporation by Reference (usable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	12. <input type="checkbox"/> Preliminary Amendment
6. <input type="checkbox"/> Microfiche Computer Program (Appendix)	13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies	14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application Status still proper and desired
17. If a CONTINUING APPLICATION , check appropriate box and supply the requisite information: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No:	15. <input type="checkbox"/> Certified Copy of Priority Document(s)
18. CORRESPONDENCE ADDRESS: Steven P. Wigmore, Registered Patent Agent KING & SPALDING 45 th Floor 191 Peachtree Street, N.E. Atlanta, Georgia 30303	16. <input type="checkbox"/> Other: _____ _____ _____

By: Steven Wigmore Reg. No. 40,447
Date: March 15, 2000
Telephone: 404.572.4600
Facsimile: 404.572.5145

OPTICAL NETWORKING ASSEMBLY

STATEMENT REGARDING RELATED APPLICATIONS

5 This application is related to U.S. Patent Application Serial No. 09/267,258 entitled, "Method and Apparatus for Filtering an Optical Fiber," and claims the benefit of priority to U.S. Provisional Application No. 60/124,424 entitled, "Optical Networking Assembly," filed March 15, 1999.

10 TECHNICAL FIELD

This invention relates generally to the manipulation of light carried by optical fibers. More particularly, the present invention relates to filtering light and propagating reflected light along optical paths of a planar lightguide circuit.

15 BACKGROUND OF THE INVENTION

In recent years, the use of optical fibers has become increasingly widespread in a variety of applications. Optical fibers have been found to be especially useful for many industries such as telecommunications, computer-based communications, and other like applications.

20 To maximize efficiency of optical waveguides, multiple information channels can be multiplexed into a single optical beam. In other words, multiple channels of information can propagate along an optical waveguide as a single beam of light energy. In order to form the multiplexed optical signal or to demultiplex the optical signal, optical filters are typically employed to separate light energy of a first wavelength from
25 light energy having different wavelengths. To maximize optical filter efficiency, light energy can be collimated such that rays of light forming an optical beam travel in a manner parallel with one another. Such a collimation of light energy enables individual rays to strike an optical filter at a desired angle. Without collimating light energy, individual rays of light could strike an optical filter at undesirable angles which reduces
30 optical filter efficiency.

For example, in the conventional art as illustrated in FIG. 1, an expanded beam optics system 10 can be used to separate channels of information of a single optical beam 20 that propagates along an optical waveguide 15. Each channel of the single

optical beam 20 can have a different wavelength. For example, the single beam 20 as illustrated in FIG. 1 can include separate information channels that are carried by a first optical beam having a wavelength of λ_1 and a second optical beam having a wavelength of λ_2 .

5 The expanded beam optics system 10 can employ a lens 30 to collimate the beams of optical energy forming the single optical beam 20. The lens 30 is necessary hardware for the conventional system since whenever optical energy leaves one medium and enters into another medium the optical energy refracts or diverges because of the changes in the indices of refraction of the different materials. In addition to the
10 lens 30, the expanded beam optics system 10 also uses free space 40 between an optical filter 50 and the lens 30. The free space 40 may be open space or it may include another medium such as a glass block (not shown).

In FIG. 1, a few of the optical beams 25 that form the single beam 20 are illustrated in order to demonstrate that the individual optical beams 25 are substantially
15 parallel with one another when exiting the lens 30. When the individual optical beams 25 strike the optical filter 50, only optical beams of a predetermined wavelength are permitted to pass through the optical filter 50. In the example illustrated in FIG. 1, the optical filter is designed to pass only optical beams having a wavelength of λ_1 . The individual optical beams 25 having a wavelength of λ_1 pass
20 through the optical filter 50 and through a glass plate 60 that supports the optical filter 50. The filtered optical beam 70 exits the glass plate 60. The light reflected off of optical filter 50 has optical beams that have wavelengths other than λ_1 , such as λ_2 .

One of the drawbacks of the conventional art is that with such a traditional
25 optics systems 10 larger mechanical configurations are required. In other words, the lens 30 is typically large and bulky relative to the size of the optical waveguide 15. Furthermore, the amount of collimation for light energy with a lens 30 can be directly related to the cross sectional area of the optical beam. Expanded beam optics systems
10 require precision alignment and mounting of the optical devices relative to each other. In other words, the optical waveguide 15 must be in precise alignment with the
30 lens 30 to promote optical efficiency. Similarly, the lens 30 must be in precise optical alignment with the optical filter 50 in order to also promote optical efficiency. Such configurations are not cost efficient for mass production. Additionally, much optical

signal loss can occur between the waveguide-lens interface and the lens-free space interface.

Accordingly, a need in the art exists for separating optical energy into separate optical beams of different wavelengths with a higher efficiency. There is a further need in the art for a system for separating optical energy that can optimize the transfer of single mode optical energy propagation between an optical waveguide and a filtering device. An additional need in the art exists for a system that can tolerate a certain amount of misalignment between optical hardware without introducing substantial optical losses. Another need exists in the art for a system separating optical energy that can be easily manufactured and scaleable smaller sizes compared to traditional expanded beam optics that require a substantial amount of hardware. Another need exists in the art for a system for separating optical energy without the use of lenses.

SUMMARY OF THE INVENTION

The present invention solves the problems of expanded beam optics systems by providing an optical network assembly that includes a planar lightguide circuit (PLC) and a filtering device. A PLC can have at least two optical paths for propagating optical energy. The PLC can be designed to channel optical energy to the filtering device in order to separate the optical energy into at least two beams, where a first beam can contain a first information channel and a second beam can contain a second information channel. The filtering device can be attached directly to the PLC or it can be attached directly to an optical waveguide that is also connected to the PLC. This direct attachment can be accomplished by building up the filtering device on the PLC or on the optical waveguide with a thin film deposition process. The optical waveguide can be a flexible optical fiber that is part of a communications network. The optical waveguide can either feed optical energy to or propagate optical energy away from the PLC. Multiple optical waveguides can be attached to a PLC to feed optical energy into and away from the PLC.

Each optical path of a PLC can be made of a transparent core of relatively high refractive index, light-conducting material while the planar material surrounding an optical path can be made of a medium having a lower refractive index. The optical paths can be made of silica, plastic, glass, or low-to-no expansion optical material such as ZERODUR glass. Each of the optical waveguides can be made of materials similar to a PLC. Both the optical waveguides and PLCs can be designed to propagate single

modes of optical energy such that the optical energy travels as a single wavefront in order to reduce attenuation and other undesirable effects while increasing bandwidth and transmission properties such as increases in traveled distances.

A PLC or a filtering device (or both) can optimize transfer of single mode optical energy propagation (referred to as modal transfer) between an optical waveguide and the PLC. The PLC and filtering device can be designed to minimize modal disruption (such as changes in E-Field geometry) of optical energy that can occur during the modal transfer of the optical energy between an optical waveguide and the PLC. A PLC can minimize modal disruption that occurs within an interface or junction between the PLC and another light carrying device by facilitating efficient alignment between the PLC and the other light carrying device.

In other words, a PLC's geometry permits rapid and efficient alignment between a PLC and another light carrying device such as an optical waveguide. A PLC in combination with another light carrying device can tolerate a certain amount of misalignment relative to each other without introducing substantial optical losses. This tolerance of misalignment can also increase manufacturability of an optical system that includes a PLC since dimensioning of both a PLC and other light carrying device can be relaxed.

Furthermore, a PLC can permit the use of passive alignment techniques that can reduce time as well as expense compared to conventional active alignment techniques that require signal propagation measurements. That is, with passive alignment, signal propagation testing can be substantially eliminated. Additionally, PLCs can be scaled to smaller sizes compared to traditional expanded beam optics that require additional hardware such as lenses. PLCs can interact with filtering devices without the use of lenses that are typically required in traditional optics to collimate optical energy.

Similar to a PLC, a filtering device in combination with a PLC can optimize the modal transfer between a PLC and another light carrying device. One way to optimize modal transfer between a light carrying device and a PLC is to deposit the filtering device directly on the PLC itself or the light carrying device that can be connected to the PLC. Another way to optimize modal transfer between a light carrying device and a PLC is to reduce a thickness of the filtering device such that optical energy can be transferred to or away from a PLC in the near field. In other words, by reducing the thickness of a filtering device, divergence of optical energy propagating through the filtering device can be reduced or become negligible because the interface between the

PLC and light carrying device is substantially small such that optical energy is essentially channeled in a waveguide between the light carrying device and PLC.

Another way to optimize the modal transfer of optical energy between a light carrying device and a PLC is to provide modal adaptations such as changes in geometry in the vicinity of the PLC-light carrying device junction in order to shape the actual mode fields of optical energy. For example, the cross sectional geometry of the either the PLC or light carrying device or both can be adjusted to match each other such that the mode field propagated by the PLC matches the mode field propagated by the light carrying device.

A filtering device can optimize modal transfer between a light carrying device and a PLC by increasing the packing density of the filtering device such that the filtering device approaches a bulk density. In other words, an increased packing density of a filtering device can substantially reduce or eliminate voids within the filtering device that interfere with the propagation of optical energy. Such voids can trap light reflecting or light disturbing materials such as water vapor.

The PLC and filtering device can form building blocks for more complex optical networks or network architectures. In one aspect of the present invention, a PLC and filtering device combination can form a drop or add configuration where one channel of information propagating within a multichannel or multiplexed optical beam can be either dropped from or added to the multichannel or multiplexed beam. In another aspect, the PLC and filtering device combination can form a single channel drop-add configuration where one channel can be dropped from a first multichannel optical beam and then added to a second multichannel optical beam.

In yet another aspect, optical paths within a PLC can be non-linear or curved in order to provide control over an angle of incidence of an optical beam striking the filtering device to minimize obliqueness. The PLC and filtering device combination can form a waveguide-constrained cascade where the PLC can include multiple optical paths that lead to a plurality of filtering devices. Such waveguide-constrained cascades can either multiplex or demultiplex optical energy that propagates through light carrying devices. The PLC and filtering device combination can multiplex separate optical beams having individual channels into a single optical beam or demultiplex a single optical beam into separate optical beams with distinct or different channels.

In another aspect, the PLC and filtering device combination can include multiple mirrors coupled to the PLC that re-direct optical energy onto a plurality of

filtering devices. This can refocus optical energy in order to reduce any optical beam divergence as the optical energy reflects off of a filtering device. Alternatively, the PLC and filtering device combination can form a daisy-chained path waveguide that can optimize positioning or alignment of the optical paths of a PLC with a plurality of filtering devices.

In a further aspect, the PLC and filtering device combination can form a remotely configurable drop-add plus optical cross connect network. The PLC and filtering device combination can further include an activating or diverting element such as a moving mirror that diverts a channel signal out of an optical circuit while introducing a new signal content along the same channel into the optical circuit. This embodiment can function as an optical switch.

For an additional aspect the PLC and filtering device combination form a part of an amplification or gain flattening architecture. Gain flattening elements can be inserted into light paths outside of the PLC and filtering device combination to discretely attenuate channels which in turn flattens the gain of an optical signal over an extended spectral range.

Similar to how the PLC and filtering device combination can form building blocks for optical network architectures, the multiplex, demultiplex, and the optical drop-add inventive concepts can form building blocks for even larger network architectures. These larger network architectures can include a multiplex-demultiplex configuration and an optical drop-add configuration. In a multiplex-demultiplex configuration, multiple beams that each carry a unique information channel can be combined or multiplexed into a single optical beam. This single optical beam can then be propagated along a light carrying device to another PLC and filtering device combination that can then demultiplex the single optical beam into multiple optical beams. In the optical drop-add configuration, multiple channels can be multiplexed into a single optical beam and a few channels can be dropped or added or both at a point between two PLC-filtering device combinations that multiplex and demultiplex the single optical beam.

The PLC and filtering device combination, in addition to the multiplex-demultiplex configuration and optical drop-add configuration, can form an optical cross-connect configuration that permits the sharing of optical channels between at least two separate optical networks. The PLC can be formed with a single segment of optical material suitable for an optical waveguide. A sharp bend of an appropriate

angle can be introduced into the single segment of optical material so that the PLC and the optical waveguide form an integral unit.

A PLC can be integrated into a bulk matrix. This structure can be formed by utilizing polymer molding techniques such as insert injection molding or by planar waveguide fabrication.

The PLC and filtering device combination can further optimize modal transfer of optical energy by manipulating the shape of the optical paths disposed within a PLC. In other words, an optical path of a PLC can be shaped in such a way as to minimize the divergence of optical energy as the optical energy passes through the filtering device. An optical path within a PLC can be tapered so that optical energy is projected optimally through the filtering device and into a fiber core of an optical waveguide. The shaping of optical paths within a PLC can reduce losses that can occur when optical energy propagates through the filtering device.

The PLC and filtering device combination can be part of mounting structures that facilitate the precise alignment of light carrying devices such as optical waveguides with each PLC and filtering device. These mounting structures can include blocks comprising cavities having a shape similar to a respective PLC. Other mounting structures can include V-groove based assemblies that are designed to align optical waveguides by supporting the outer cladding of optical waveguides with a respective V-groove. The V-grooves can be made at appropriate angles relative to one another as dictated by the number of optical waveguides to be coupled and the type of PLC and filtering device being employed.

That the present invention improves over the drawbacks of the conventional art and accomplishes the objects of the invention will become apparent from the detailed description of the illustrative embodiments to follow.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates an expanded beam optics system of the conventional art for the separation of optical energy into optical beams of different wavelengths.

FIG. 2 is a diagram that illustrates a single-channel drop or add configuration according to an exemplary embodiment of the present invention.

FIG. 3 is a diagram that illustrates a single-channel drop-add configuration according to an alternate exemplary embodiment of the present invention.

FIG. 4 is a diagram that illustrates a straight-line path single-channel drop-add configuration according to an alternate exemplary embodiment of the present invention.

FIG. 5 is a diagram that illustrates a serpentine path single-channel drop-add configuration according to an alternate exemplary embodiment of the present invention.

5 FIG. 6 is a diagram that illustrates an eight-channel demultiplex or multiplex configuration according to an alternate exemplary embodiment of the present invention.

FIG. 7 is a diagram that illustrates a four-channel drop-add configuration according to an alternate exemplary embodiment of the present invention.

10 FIG. 8 is a diagram that illustrates a four-channel drop configuration that employs concave mirrors according to an alternate exemplary embodiment of the present invention.

FIG. 9 is a diagram that illustrates a daisy chained path configuration according to an alternate exemplary embodiment of the present invention.

15 FIG. 10 is a diagram that illustrates a dynamically and remotely configurable drop-add plus optical cross-connect format configuration according to an alternate exemplary embodiment of the present invention.

20 FIG. 11 is a diagram that illustrates an element in an optical path such that existing optical channel content of a light circuit can be diverted while new channel content can be introduced to the light circuit in accordance with the embodiment illustrated in FIG. 10.

FIG. 12 is a diagram that illustrates an element out of path such that existing optical channel content of a light circuit can be uninterrupted and alternate channel content can continue on its path according to the embodiment illustrated in FIG. 10.

25 FIG. 13 is a diagram that illustrates an optical architecture for optical gain flattening and selective spectral amplification according to an alternate exemplary embodiment of the present invention.

FIG. 14 illustrates a configuration to introduce pump light according to an alternate exemplary embodiment of the present invention.

30 FIG. 15 is a diagram that illustrates a multiplex-demultiplex configuration according to an alternate exemplary embodiment of the present invention.

FIG. 16 is a diagram that illustrates an optical drop-add configuration for two networks according to an alternate exemplary embodiment of the present invention.

FIG. 17 is a diagram that illustrates an optical cross-connect configuration that permits communication between multiple networks according to an alternate exemplary embodiment of the present invention.

FIG. 18 is a diagram that illustrates a single-channel drop or add configuration that includes a shaped planar lightguide circuit according to an alternate exemplary embodiment of the present invention.

FIG. 19 is a diagram that illustrates a planar lightguide circuit integrated into a bulk matrix according to an alternative exemplary embodiment of the present invention.

FIG. 20 is a diagram that illustrates a planar lightguide circuit with shaped optical paths according to an alternate exemplary embodiment of the present invention.

FIG. 21 is a diagram that illustrates a mounting structure for optical waveguides and a planar lightguide circuit.

FIG. 22 is a diagram that illustrates a top view of a V-groove-based mounting structure according to an alternate exemplary embodiment of the present invention.

FIG. 23 is a diagram that illustrates a mounting structure for optical waveguides according to an alternate exemplary embodiment of the present invention.

FIG. 24 is a diagram that illustrates an optical waveguide that includes a thin-film interference filter and a fiber Bragg grating according to an alternate exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

To understand the operation and design of planar lightguide circuits (PLCs), a review of fiber optics in general can be beneficial to the reading audience. The term "optical fiber" is used herein to refer generally to any optical waveguide or structure having the ability to transmit the flow of radiant energy along a path parallel to its axis and to contain the energy within or adjacent to its surface. "Step index," "gradient index," and "single mode" fibers are subcategories within the optical fiber designation. The term "multimode" optical fiber refers to an optical waveguide that will allow more than one bound mode to propagate.

Step index fibers include a transparent cylindrical core of relatively high refractive index light-conducting material. Typical core materials include silica, plastic, and glass. The core is cylindrically surrounded by a medium having a lower refractive index. Typically, this medium is a relatively thin cladding, which is an intimately bound layer surrounding the core. The cladding may be a different material than the

core, or it may be a similar material that has been doped in order to reduce its refractive index. The core may also be unclad whereby the ambient medium, often air, is of lower refractive index and acts in the capacity of the cladding. The cladding is usually surrounded by one or more coatings, buffers, and/or jackets that primarily serve protective roles.

An arbitrarily oriented ray within the core of a step index fiber travels until it intersects the core boundary at the cladding and interacts in accordance with its angle of incidence. Generally, rays angularly oriented close to parallel with the fibers axis are efficiently reflected at the core boundary. Within certain angular limitations, the ray is oriented to undergo total internal reflection at the core interface. These angular limitations are a function of the refractive indices of the core and the cladding. The limits determine the angular bounds within which the fiber can propagate light. Thus, sustained propagation occurs via repeated total internal reflection within the fiber core. If the arbitrary ray is oriented beyond the fiber's limits for total internal reflection, then only a fraction of its intensity is internally reflected. The reduced intensity ray is further attenuated as it undergoes subsequent core boundary interactions. The ratio of light energy that is internally reflected to the energy that escapes varies according to the angle. If the ray is oriented normal to the core boundary, then all of its intensity is lost. As the angle of an improperly oriented ray approaches the acceptance limits for total internal reflection, the relative intensity of the reflected ray increases. Thus, for rays with angle orientation close to, but outside of, the limits for total internal reflection, multiple reflections can occur prior to significant power loss.

If the arbitrarily oriented ray within the fiber core has sufficient power and orientation, then it sustains power and eventually reaches the fiber end face. It interacts with the end face boundary in accordance with the laws of reflection and refraction. As the ray crosses the end face boundary between the fiber's core and the surrounding medium, it is refracted. The refractive effect is a function of the refractive index of the core, the refractive index of the surrounding medium, and the orientation of the ray relative to the fiber end face surface. The factor of ray orientation is based upon its angle relative to a surface normal taken at the point where the ray intersects with the end face surface boundary. Angular orientation of rays outside the fiber end face and propagating rays within the fiber core are distinctly correlated. A correlation exists between individual and collective external and internal rays.

0956094.034500

The previous discussion centered on rays internally propagating and exiting the fiber. An analogous situation exists for rays outside the optical fiber entering into the fiber core. The correlating development is readily drawn by those skilled in the art. For a fiber utilized for single-direction flow of light, light is typically injected into the fiber at one end and exits the fiber at the opposite end. However, fibers can also be utilized in a bidirectional configuration. In this configuration, light purposely enters and exits from a single end of the fiber.

As light propagates within the fiber core, it tends to become mixed or randomly oriented over distance. Even highly directional sources, such as lasers, become mixed or scrambled over distance following input into a long optical fiber. In this mixing process, the fiber's modes are filled and all source characteristics, or so-called launch conditions, are lost. The mixing process can be accomplished in shorter fibers by tightly coiling the fiber, inducing micro-bends, or otherwise stressing the fiber. Similarly, for very short fiber lengths, launch characteristics are retained. Also, for very short lengths of fiber, light can be transmitted beyond the normal limits for propagation dictated by the angular limits for total internal reflection. This property is due to the reduced number of reflections, which accumulate minimal attenuation. A fiber's ability to sustain transmission beyond the normal limits for total internal reflection can be enhanced by the application of internally reflective coatings applied to the fiber's outer cylindrical surface. This coating can be applied to either the fiber's core or the cladding. It should be noted that, for long fibers, propagation cannot be totally reliant on reflective coatings. In contrast to total internal reflection, even the best reflective coatings offer less than 100 percent reflectivity. Losses associated with repeated reflections at less than 100 percent efficiency quickly accumulate resulting in severe attenuation. Vast numbers of reflections occur during propagation in even moderate fiber lengths.

While the above discussion provides some technical insight for many types of optical fibers and optical waveguides in general, a preferred exemplary embodiment of the present invention is designed to propagate single mode optical energy. To propagate single mode optical energy, the core diameter of the PLCs and any associated optical fibers must be sufficiently small so that the optical energy will travel as a single wavefront having a mode field slightly larger than the core. That is, single mode optical devices can be made with the materials discussed above, however, these optical devices are scaled or sized to support single mode optical energy propagation.

FIG. 2 illustrates an exemplary optical network assembly **200** that includes a planar lightguide circuit (PLC) **210** and a filtering device **220**. The exemplary PLC **210** illustrated in FIG. 2 can include a first optical path **230** and a second optical path **240**. The first optical path **230** can be connected to a first optical waveguide **250** that has a first optical core **255**. The filtering device **220** and the first optical path **230** can be connected to a second optical waveguide **260** that has a second core **265**. The second optical path **240** can be connected to a third optical waveguide **270** that has a third core **275**.

It is noted that the cores **255**, **265**, and **275** of the first, second, and third optical waveguides, respectively, each have arrow heads to designate the direction of flow of optical energy. In the actual physical embodiments of these waveguides, the optical cores are shaped similarly to the optical paths **230**, **240** of the PLC **210**.

Each optical path **230**, and **240** of the PLC as well as the cores **255**, **265** and **275** of the optical waveguides, can be made of a transparent material that has a relatively high index of refraction. The material **280**, **285**, **290**, and **295** surrounding the optical paths **230**, **240** and cores **255**, **265**, and **275** can be made of a medium having a lower index of refraction relative to the cores and optical paths. This surrounding material may be different than that of the optical paths and cores or it may be a similar material wherein a dopant is introduced to alter its refractive index. Alternatively, a dopant can be introduced to either the core or optical path of a PLC or both in order to alter the refractive index of the core or path or both relative to the surrounding material. The optical paths and cores can be made of silica, plastic, high quality optical glass such as BK-7, or low-to-no expansion optical material such as ZERODUR glass.

PLC fabrication processes include ion exchange, flame hydrolysis, and reactive ion etching. The waveguide can be imposed onto a substrate by depositing or growing a high index film on the substrate surface or by diffusing a dopant into the substrate surface. Etching and/or photolithographic techniques can be used to cast the optical paths within a PLC into desired circuit patterns.

Both optical waveguides **255**, **265**, and **275** and the optical paths of the PLC **210** can be designed to propagate single modes of optical energy so that the optical energy travels as a single wave front in order to substantially reduce attenuation while substantially increasing band width and transmission distances. The PLC **210** can optimize the transfer of single mode optical energy propagation (referred to as modal transfer) between the optical waveguides **250**, **260**, and **270** and the PLC **210** itself.

09526091.034500

The PLC **210** can minimize the modal disruption of optical energy that can occur during the transfer of the optical energy between the optical waveguides **250**, **260**, **270**, and the PLC **210**. The PLC **210** can minimize modal disruption by facilitating efficient alignment between the PLC **210** and the optical waveguides **250**, **260**, and **270**. In other words, the PLC's geometry permits rapid and efficient alignment between the PLC **210** and the optical waveguides **250**, **260**, and **270**. The PLC **210** can tolerate a certain amount of misalignment with the optical waveguides **250**, **260**, and **270** without introducing any substantial optical losses. This tolerance of misalignment can translate into increased manufacturability of an optical system that includes the PLC **210** since dimensioning of the PLC **210** or light carrying device or both can be relaxed. An optical system can include the PLC **210** in combination with light carrying devices such as one or more optical fibers.

Furthermore, a system including the PLC **210** can permit the use of passive alignment techniques that can reduce time as well as expense for assembly of the system itself compared to conventional active alignment techniques that require signal propagation measurements. Additionally, the PLC **210** can be scaled to much smaller sizes compared to traditional expanded beam optics systems that require additional hardware such as lenses. The PLC **210** can interact with the filtering device **220** without the use of lenses.

Similar to the PLC **210**, the filtering device **220** in combination with the PLC **210** can optimize the modal transfer between the PLC **210** and the second optical waveguide **260**. One way to optimize modal transfer between the PLC **210** and optical waveguide **260** is to deposit the filtering device **220** directly on the PLC **210** itself or by depositing the filtering device **220** directly on the end of the second optical waveguide **260**. Another way to optimize modal transfer between the PLC **210** and the second optical waveguide **260** is to substantially reduce the thickness of the filtering device **220** such that optical energy can be transferred to or from the PLC **210** in the near field. In other words, by substantially reducing the thickness of the filtering device **220**, divergence of the optical energy propagating through the filtering device **220** can be substantially reduced or become negligible. The interface between the light carrying device and PLC **210** can be made substantially small such that optical energy is directed in a waveguide effectively formed between the PLC **210** and the light carrying device, such as second waveguide device **260**.

The filtering device **220** can further optimize the modal transfer between the PLC **210** and second optical waveguide **260** by increasing the packing density of the filtering device **220** such that the filtering device **220** approaches a bulk density. In other words, increasing packing density of the filtering device can substantially reduce or eliminate voids within the filtering device **220** that interfere with the propagation of optical energy. Such voids can sometimes trap light reflecting or light disturbing materials, such as water vapor, that can interfere with optical energy propagation. The filtering device **220** can be a dielectric, thin-film interference filter of alternating refractive index layers.

The filtering device **220** can have a packing density in excess of 90 percent. In other exemplary embodiments, the packing density for the filtering device **220** can be above 95 percent. In further exemplary embodiments, the packing density can be above 99 percent. In an exemplary embodiment, the filtering device can include refractory oxides. The filtering device **220** can also be a band pass filter covering at least one channel.

However, the filtering device in other embodiments can also be a high-pass, low-pass, or a band stop filter. The filtering device **220** can also be a rugate filter. The operating wavelength of the filtering device **220** can be a variety of wavelengths, including 830 nanometers, 1310 nanometers, and 1550 nanometer windows. The slope of the filtering device **220** relative to corresponding optical paths **230** and **240** can be steep. In some exemplary embodiments, the filtering device **220** can be capable of differentiating between channels spaced less than two nanometers apart. In another exemplary embodiment, the filtering device can have a transmission greater than 90 percent at a first wavelength channel and blocking at least 25 decibels (dB) down at adjacent channels spaced 1.8 nanometers away and at least 35 decibels at non-adjacent channels. Alternatively, the filtering device can also be a tunable filter.

The PLC **210** and filtering device **220** combination can separate optical energy having at least two channels of information propagating at different wavelengths λ_1 and λ_2 . The PLC **210** and filtering device **220** combination can separate the optical energy propagating in the first optical waveguide **250** into its discrete component beams that have wavelengths of λ_1 and λ_2 . The PLC **210** and optical filtering device **220** separate the optical energy by receiving the optical energy from the first optical waveguide **250** and propagating the optical energy along the first optical path **230** of the PLC **210**. The first

optical path **210** can propagate the optical energy towards the filtering device **220** that has an operating wavelength of λ_1 . The filtering device **220** can be disposed at an angle α relative to the first optical path **230** such that all the optical energy having a wavelength of λ_1 will flow through the optical filtering device **220** into the second optical waveguide **260**. The remaining optical energy having a wavelength other than λ_1 , such as a wavelength λ_2 , can then be reflected away from the optical filtering device **220** along the second optical path **240** of the PLC **210**. The optical energy propagating along the second optical path **240** can then be carried further away by the third optical waveguide **270**.

It is noted that the thickness of the optical filtering device **220** as illustrated in FIG. 2 has been exaggerated for illustration purposes only. In an actual physical embodiment, the optical filtering device **220** can be much thinner and disposed substantially within the second optical waveguide **260** or attached directly to a side of the PLC such that its thickness is negligible compared to the planar surface of the PLC **210**.

The PLC **210** can have a substantially rectangular shape as illustrated in FIG. 2. However, other shapes are not beyond the scope of the present invention. The PLC **210** can have two optical paths **230** and **240** as illustrated in FIG. 2. However, the number and orientation of optical paths are not limited to those shown in FIG. 2. The number of optical paths may be increased or decreased depending upon the application of the PLC **210**. In an exemplary embodiment, the PLC **210** can be designed to couple to one or more single mode fibers. With the PLC **210**, the separation between the PLC **210** and the optical waveguides **250**, **260**, and **270** can be minimized so as to minimize power loss and signal degradation associated with optical beam divergence. The PLC **210** further minimizes the obliqueness of light incident on the filtering device **220** so as to maximize the filtering device performance.

The PLC **210** can be designed such that the longitudinal axis of the cores **255**, **265**, and **275** of the optical waveguides are substantially aligned with the longitudinal axis of the respective optical axes of the first and second optical paths **230**, **240**. This design overcomes the long-standing challenge with optical structures incorporating single mode fibers where only a small percentage of the fiber end-face has active optical energy.

The direction of optical energy flowing through the optical waveguides **250**, **260**, and **270** and the PLC **210** in filtering device **220** is not limited to the direction

illustrated in FIG. 2. The direction of the optical energy can be reversed with respect to the arrows illustrated in FIG. 2 such that “add” configuration can be made. In other words, instead of dropping a channel propagating along an optical beam having a wavelength of lambda one (Λ_1), optical energy having wavelengths other than lambda one (Λ_1) can be added to a stream of optical energy (as will be discussed below with respect to FIG. 3). The PLC **210** and optical filtering device **220** are well suited for optical network technology. Such technology includes, but is not limited to, telecommunications, community antenna television (CATV) applications, computer networking, and other similar types of applications.

FIG. 3 illustrates a single-channel drop-add configuration in which two PLC-optical filtering device combinations are used to drop a channel propagating upon an optical beam having a wavelength of lambda one (Λ_1) while adding optical energy having wavelengths other than lambda one (Λ_1) to an optical beam having a wavelength of lambda one (Λ_1). In other words, the configuration illustrated in FIG. 3 has two spectrally compatible band-pass filtering devices **220A** and **220B** that are physically opposing one another. The filtering devices may operate either on a single channel or a group of channels. The filtering devices **220A** and **220B** can also be constructed as high-pass or low-pass type filters. While dropping and adding the same channel is depicted, the drop and add channels can be unique. It is noted that the angular geometry of the light paths and end-faces of the PLC **210A** and **210B** are such that the end-faces of the PLC **210** and **210B** can be within two parallel planes. The opposing optical waveguides can then be disposed in a parallel manner. The angle of light incident onto a filtering device end-face can equal the angle of reflected light.

In the exemplary embodiment set forth in FIG. 3, optical energy **A** has optical beams having wavelengths of lambda one (Λ_1) and lambda two (Λ_2) that enter into PLC **210A**. The filtering device **220A** operates at a wavelength of lambda one (Λ_1) such that an optical beam **B** having a wavelength of lambda one (Λ_1) can pass through the filtering device **220A**. The remaining optical energy **C** having an optical beam with a wavelength of lambda two (Λ_2) can be carried away by an optical waveguide toward a PLC **210B**. An optical beam **B** with a wavelength of lambda one (Λ_1) is fed into the filtering device **220B** such that the optical beam **B** passes through the optical filtering device **220B** that operates at a wavelength of lambda one (Λ_1). Optical energy **C** having a wavelength of lambda two (Λ_2) is reflected off of the optical filtering device **220B** and combines with the optical beam **B**. The optical beam **C** and the optical beam

B can combine to form optical energy **A** having wavelengths λ_1 and λ_2 . While optical energy **A** exiting filtering device **210B** and optical energy **B** entering filtering device **220B** can have the same wavelengths as optical energy **A** and **B** entering and exiting filtering device **220A**, the information content modulated on these respective optical beams can be different relative to each other. That is, information content modulated on optical energy **A** at optical filtering device **220A** can be different than information content modulated on optical energy **A** at optical filtering device **220B**. Alternatively, as apparent to those of ordinary skill in the art, information content at both optical filtering devices can be the same. This information modulation concept is also applicable to the remaining exemplary embodiments of the present invention.

FIG. 4 illustrates another exemplary embodiment of a single-channel drop-add configuration where the PLC **210C** can form a cascade structure in which multiple reflections take place within the PLC **210C** between multiple filtering devices **220A** and **220B**. This exemplary embodiment can be referred to as a straight-line path PLC configuration because the optical paths of the PLC **210C** can track the optical energy's path as it zigzags between filtering devices **220A** and **220B**. The resulting functionality of the embodiment illustrated in FIG. 4 is similar to that illustrated in FIG. 3. However, the PLC **210C** illustrated in FIG. 4 can have at least three optical paths that interact with at least two optical filtering devices **220A** and **220B**. Confining optical energy within the optical paths of the PLC **210C** maintains intensity of the optical channels that are manipulated, and asserts control over modal patterns as well as preserving optical pulse quality.

FIG. 5 illustrates another alternate exemplary embodiment of a single-channel drop-add configuration. However, in this alternate exemplary embodiment, the second optical path **240'** of the PLC **210D** can have a serpentine configuration such that control over the angle of incidence with respect to optical energy impinging on the filtering devices **220A** and **220B** can be controlled to minimize obliqueness. This, in turn, increases optimal performance of the optical filtering devices **220A** and **220B**. Although the second optical path **240** is also illustrated in the exemplary PLC **210D**, it will be appreciated that the optical path **240** would not be present within the PLC **210D** in an actual physical embodiment.

FIG. 6 illustrates another alternate exemplary embodiment that includes an eight-channel demultiplex or multiplex configuration. In this alternate exemplary

embodiment, optical energy having wavelengths λ_1 through λ_N (λ_N) is fed into a PLC **210E**. The optical filtering devices A-H filter out or drop their respective channels. After the optical energy is cascaded through the PLC **210E**, the remaining optical energy, comprising wavelengths of λ_9 to λ_N (λ_N), can then be fed away from the PLC **210E**. Although the embodiment illustrated in FIG. 6 support a demultiplexing architecture, a multiplexing function can be achieved by reversing the input and output of light energy relative to the PLC **210E**.

FIG. 7 illustrates a further alternate exemplary embodiment that can provide a four-channel drop-add configuration. In this exemplary embodiment, optical energy having wavelengths of λ_1 through λ_N (λ_N) can be introduced into PLC **210E**. Channels having wavelengths λ_1 through λ_4 (λ_4) are dropped and then reintroduced into the PLC **210E**. In other words, as respective information channels having wavelengths λ_1 through λ_4 (λ_4) are dropped, different signals that may operate upon the same wavelengths can be reintroduced into the PLC **210E**. Therefore, optical energy having wavelengths λ_1 through λ_N (λ_N) can be introduced into the PLC **210E** and can exit the PLC **210E**. However, it is noted that the information content of the optical energy having wavelengths λ_1 through λ_N (λ_N) entering into the PLC **210E** can be different than the optical energy having wavelengths λ_1 through λ_N (λ_N) exiting the PLC **210E**.

FIG. 8 illustrates another alternate exemplary embodiment where the PLC **210E** is designed to drop four channels having wavelengths of λ_1 through λ_4 (λ_4). The optical energy is cascaded through the PLC **210E** by a plurality of optical filtering devices **A** through **D** and focusing reflective elements **E-H**, which that can include concave mirrors.

Each mirror can correct for or reset beam divergence along the cascade path within the PLC **210E** and substantially reducing any need for collimation. Fabrication of the PLC **210E** and focusing reflective elements **E-H** can be achieved by molding or a micro-machining materials, such as low-to-no expansion glass and optical polymers positioned within the optical cascade path. As optical energy reflects off a respective optical filtering device **A-D**, it can diverge or spread out relative to its original path. The concave mirrors **E-H** can substantially correct for this divergence by refocusing the optical energy to the next optical filtering device within the cascade.

FIG. 9 illustrates an additional alternate exemplary embodiment of the present invention in which the PLC **210F** includes a daisy-chained path construction. Each optical path within the PLC **210F** is curved to provide additional control over the angle of incidence onto a respective optical filtering device to minimize obliqueness. In this embodiment, optical channels propagating with wavelengths of lambda one (Λ_1) through lambda four (Λ_4) can be dropped from the optical energy having wavelengths of lambda one (Λ_1) through lambda N (Λ_N).

FIG. 10 illustrates a dynamically and remotely configurable drop-add plus optical cross-connect configuration. In the drop leg, lambda three (Λ_3) of a channel can be fed back into the add leg as lambda three (Λ'_3). The resulting loop not only bypasses the drop-add function but also provides a way to introduce dynamic configuration capabilities and extended functionality. As illustrated, a diverting element **1000**, such as a double-sided mirror, can divert a channel's signal content such as lambda three (Λ_3), out of the optical circuit and introduce new signal content, represented by lambda three (Λ'_3), back into the optical circuit. If the diverting element **1000** is inserted at a point common to the branches of the two optical circuits, then the diverting device **1000** can operate as a configurable optical cross-connect.

Signals from the first circuit can be diverted to the second circuit. Likewise, signals from the second circuit can be diverted into the first optical circuit. Activation of the diverting element **1000** can be controlled by transmitting configuration commands with primary optically encoded information across an optical circuit. In this manner, information packets and accompanying drop locations can be transmitted across the optical network. One way to send this optical configuration information is to dedicate a channel to this function. A second way can be to tap off a fraction of the signal at a potential drop location. The signal may be sampled at pre-determined times without constant drain on network power.

Alternatively, a small portion of the optical power can be continually monitored. While a beam splitter can be used, less intrusive devices are available to monitor the optical signals. For example, commercial monitors are also available to externally access a fiber's active versus dark power status. However, such monitors lack the ability to read normally encoded, high-speed messages. By transmitting address headers that contain device configuration instructions under a distinct encoding regime, detection power threshold can be reduced.

Further, a header can be transmitted at a significantly slower light pulsing rate or distributed between several spectral channels. An optical circuit can include an optional monitor port having a beam splitter or similar component to tap off a portion of the light intensity for dynamic monitoring. Upon the recognition of signal patterns, the diverting device **1000** can be activated in response to the detection of recognized signal patterns by the monitoring port **500**.

FIG. 11 illustrates the diverting element **1000** within the optical path of a light circuit. In accordance with this illustration, existing channel content operating at a wavelength λ_3 (λ'_3), can be diverted while new channel content operating at λ_3 (λ'_3) can be introduced into the light circuit.

In FIG. 12, the diverting element **1000** is outside an optical path of a light circuit. The existing channel content operating at λ_3 is uninterrupted while alternative channel content operating at λ'_3 continues on its path through the optical path.

FIG. 13 illustrates an optical architecture for optical gain flattening or spectral amplification. An optical network spectral window of operations can be defined, in a large part, by the spectral range of amplification. Since amplification gain can vary dramatically with wavelength, the extent of each channel's amplification can be defined by its spectral position. This phenomenon can be particularly programmatic for networks with multiple amplifiers, as the channel gain differential increases with multiple amplifications. In the assembly illustrated in FIG. 13, the channels operating at wavelengths λ_1 through λ_4 are attenuated discretely by gain flattening elements **1300** to flatten the gain of an extended spectral range. This approach can facilitate broadening of the spectral window of operation, heightening the channel count, and increasing a networks bandwidth.

The gain flattening elements **1300** can be represented as attenuators inserted into the light path. Appropriate attenuation can be applied to each channel to equalize the signal strength across the spectral range of channels. One gain flattening element can be an attenuating fiber where the length of the fiber is set as appropriate to realize desired signal strength reduction. This attenuating fiber can be produced by subjecting the fiber to prolonged, intense ultraviolet radiation such that it "browns."

Similarly, absorbing material may be introduced into optical fiber materials. For example, the OH content of an optical fiber's silica can be controlled to set the spectral attenuation level. Another approach is to include the attenuation function

within a waveguided filtering element. Another approach is to apply an attenuating coating onto the end-face surface of a waveguided filtering element underneath a filtering layer. A further approach is to include attenuation material within the zigzag-depicted optical path within the PLC **210E**. Another approach is to position the channels with the highest power into locations with the lowest power transfer efficiency, thereby achieving an inherent reduction of power that accompanies beam divergence in the zigzag optical path of a PLC **210E**.

The assembly illustrated in FIG. 13 supports a discrete-channel approach to signal amplification which is different from the common approach of collectively amplifying the channels. In the illustrated embodiment, the elements **1300** depicted can be amplifiers that apply selective gain to each spectral region. The spectral regions may contain one or numerous channels. For example, this amplification can be effective in transmitting and amplifying at both 1310 nanometers and 1550 nanometer spectral windows. The device architecture illustrated in FIG. 13 can provide multiple functions in a single integrated or modular unit.

FIG. 14 illustrates an add configuration that can be utilized to introduce pump laser light into an optical fiber or other waveguide such that in-the-waveguide amplification can be efficiently accomplished. In this embodiment, the optical filtering device operating at a wave length of lambda one (Λ_1) can efficiently pass the pump laser light operating at lambda one (Λ_1) into a pulse stream operating wavelength at lambda one (Λ_1) through lambda N (Λ_N).

FIG. 15 illustrates another alternate exemplary embodiment of a multiplex-demultiplex configuration where optical energy having wavelengths lambda one (Λ_1) through lambda N (Λ_N) can be multiplexed at a multiplexer M and then demultiplexed at demultiplexer DM. The PLC **210**, in combination with multiple optical filtering devices **220**, can form the basis or the building blocks for the multiplexer M and the demultiplexer DM.

FIG. 16 illustrates an optical drop-add configuration where optical energy operating with wavelengths of lambda one (Λ_1) through lambda N (Λ_N) can be multiplexed at multiplexer M and demultiplexed at DM. However, in between the multiplexer M and demultiplexer DM, the channels lambda one (Λ_1) and lambda two (Λ_2) can be dropped and manipulated. Signal content along channels lambda one (Λ_1) and lambda four (Λ_4) can be modified or simply monitored (remaining the same) and

then reinserted back into the optical path between the multiplexer M and demultiplexer DM.

FIG. 17 illustrates an optical cross-connect configuration where two or more networks can exchange information relative to one another. For example, a first network operating with wavelengths λ_1 through λ_N can exchange select channels of information with an optical network operating with wavelengths λ_A through λ_0 . Wavelength λ_1 is substantially equal to wavelength λ_A except that each may contain different information relative to the other. In other words, information content of wavelength λ_1 can be different relative to the information content of λ_A but each wavelength can be substantially equal in magnitude. In this embodiment, channels λ_1 and λ_4 of the first network can be replaced with channels λ_A and λ_D of the second network and vice versa. The cross-connect device CC can be implemented by variations of single-channel drop-add and cross-connect configurations, as discussed above.

FIG. 18 illustrates an alternate exemplary embodiment of a single-channel drop or add where the PLC **210G** can be made from a single segment of an optical material suitable for an input or output leg. In this embodiment, a sharp bend **1800** of an appropriate angle can be introduced into a segment **1810** such that the segment **1800** and input leg **1810** are formed as an integral unit. This may be accomplished by heating and bending, molding, or other methods of optical material manipulation. The filtering device can be attached to either the PLC **210G** or an output leg **1820**. Another method of fabrication can be to appropriately position each leg and then mold an optical polymer between the legs so as to form the PLC **210G**. In this assembly, as well as in related configurations, uncontrolled light scattering within a light carrying structure can degrade performance. A method of minimizing this unwanted light in all these assemblies can include coating appropriate surfaces with an opaque and a light-absorbing coating. For example, the entire assembly can be encapsulated in a carbon or powdered metal-loaded epoxy.

FIG. 19 illustrates another alternate exemplary embodiment where the PLC **210H** can be integrated into a bulk matrix. One method for forming this structure can be to utilize polymer molding techniques such as insert injection molding. Another method can be planar waveguide fabrication.

FIG. 20 illustrates another alternate exemplary embodiment where a PLC **210I** can have an optical path **2000** with a shape that is designed to collimate optical energy propagating there through. For single mode fibers operating in the near infrared region, the thickness of the optical filtering device **220** is significant relative to the fiber core size and outgoing light tends to diverge as it transmits through a filter stack of the optical filtering device. One method to address this situation is to shape the optical path **2000** on the opposite side of the optical filtering device **220** relative to the core **2010** of an optical fiber **2020**. As the optical path **2000** transfers light to the optical fiber **220**, the optical path can be tapered so that light is projected ultimately through the filter stack of the optical filtering device **220** and into the fiber core **2010**. Alternatively (but not shown), the single mode fiber core **2010** can be shaped to collimate light energy propagating through the fiber **220** when the flow of the optical energy illustrated in FIG. 20 is reversed.

FIG. 21 illustrates another alternate exemplary embodiment that includes a mounting structure **2100** for receiving the PLC **210**. The mounting structure **2100** includes a cavity **2110** shaped similarly to the PLC **210**. The mounting structure **2100** may further include fiber alignment and attachment channels **2120** that facilitate passive alignment of optical waveguides with the PLC **210**. The positions of optical waveguides in PLCs can be precisely maintained relative to each other in order to promote efficient optical energy transferred and to prevent modal disruption. The mounting structure can be constructed from materials and methods known within the semiconductor fabrication arts. These techniques will not be described but are capable of generating high-precision structures.

The depth at which the PLC **210** is inserted into the cavity **2110** can be an important parameter as it can influence the efficiency of light transfer between the optical waveguides and the optical paths of the PLC **210**. The positional accuracy can be built into the assembly. One or more shim slabs can be used to assist in positioning the optical waveguides in the PLC **210**. The fiber alignment and attachment channels **2120** can be shaped to conform to symmetrical optical waveguides or, alternatively, V-grooves or rails can be employed. The diameters of the fiber alignment and attachment channels **2120** can be made slightly smaller than the diameter of an optical waveguide such that the optical waveguide can be held in place with the tension of the fiber alignment and attachment channels **2120**. The PLC **210** and optical waveguides (not shown) can be fixed permanently to the mounting structure **2100** by encapsulating the

entire assembly in an epoxy, a bonding agent, or similar material. Another method for forming the PLC **210** and optical waveguides to the mounting structure **2100** is to mold a polymer around the entire assembly.

FIG. 22 illustrates another alternate exemplary embodiment that includes another mounting structure **2220**. The mounting structure **2220**, which can be configured for single-channel manipulation, includes V-grooves or similar channels **2210** that can align multiple optical waveguides **2200**. The substrate material from which the channels **2210** of the mounting structure **2220** can be formed may include low-to-no expansion glass, ceramic, silica, aluminum, silicon, or other suitable materials. The grooves or channels can be cut at appropriate angles relative to one another. Materials and techniques known to the semi-conductor arts can be used to form the channels **2210**.

A block of optical material may be inserted into a gap **2230** between optical waveguides **2200**. This block (not shown) can assist in aligning the faces of the optical waveguides since only at the proper rotation will an element's face become co-planar with the block surface. Furthermore, the block (not shown) may have a high refractive index so as to minimize beam diverges during light cascade within a PLC. For example, in the infrared region of the optical spectrum, silicon has desirable characteristics. Cubic zirconium can be another high-refractive index material and can be used for outside of the transmission range of silicon. Optical polymers and epoxies can also be used. Low-to-no expansion glass such as that marketed under the trade name ZERODUR can be utilized to minimize thermal variation.

The mounting structure **2220** may also contain waveguide channels within its structure. The block (not shown) may also have a refractive index gradient so that light is steered within the gap. The block may also comprise properties such as birefringence in order to split and/or transmit light differently according to polarization. Since polarization dependency in filtering increases with the obliqueness of an incidence angle, this can facilitate compensating for interference filters spectral variation with the angle of incidence. Calcium fluoride is an example of a birefringent crystal.

The mounting structure **2220** can be permanently fixed by a number of devices. Epoxy can be used to fill the gap and/or encapsulate the mounting assembly **2220**. Similarly, injection-molded optical polymers can be used. After the optical waveguides are positioned, they can be temporarily held in place. For example, a clamp may be used. Feeding test signals into the assembly and then micro-manipulating the

positioning (including rotation of the optical waveguides until the signals are optimized) can be a way of achieving optimum alignment. However, robotic or other automated manipulation can be used for volume-based productions. After a position is selected and the clamps of the optical waveguides are set, an epoxy or polymer can be injected around or into the assembly to provide encapsulation in environmental isolation. Encapsulation can include hermetic techniques.

FIG. 23 illustrates a mounting structure **2300** that includes V-grooves **2310**. The V-grooves **2310** can facilitate efficient alignment between two optical waveguides or combination of optical waveguides and a PLC (not shown).

FIG. 24 illustrates an optical waveguide **2400** that can be used with PLC (not shown) and optical filtering devices (not shown). In this embodiment, a fiber Bragg grating can be written into the optical fiber such that light is filtered both by the grating and an interference filter **2420** disposed at an end of the optical waveguide **2400**. The thin-film filter **2420** can operate over a broad spectral range and provides only a relatively coarse narrow spectral functionality. On the other hand, the fiber-Bragg grating **2410** can provide fine spectral resolution. Thus, the two filters can compliment one another. Thin-film interference filters, fiber Bragg gratings, and Mach-Zender-related interferometric devices are three families of filtering technologies that can be important to optical networking. Thin-film interference filters can be the most flexible in terms of light manipulation and can have the best broad spectral performance. The latter two can be noteworthy for narrow band spectral performance.

A goal of a general assembly architecture can be to provide a platform through which multiple filtering technologies can be optimally combined. A related goal can be to provide ways to integrate multiple filters into an assembly in a series fashion. Note that light is precluded from resonating between the two filters **2420** and **2410** by orienting one of the filters at an angle relative to the path of light propagation. It is further noted that the magnitude of the obliqueness of an angle of a thin-film interference filter can be minimal because of the collimated aspect of the light at that point in the optical waveguide **2400**. Tapered-based Mach-Zender technologies can be implemented but are not depicted in FIG. 24.

From the foregoing, it is apparent that the present invention has been described in relation to particular embodiments which are intended in all aspects to be illustrative rather than restrictive. Alternative embodiments will become apparent to those skilled in the art to which the present invention pertains without departing from its spirit and

CLAIMS

What is claimed is:

- 5 1. An optical network assembly comprising:
 a light circuit having a first optical path and a second optical
path, said first optical path propagating an optical energy having a first and a second
information channel contained therein; and
 a filtering device for separating the optical energy into at least
10 two optical beams, a first beam containing said first information channel and second
beam containing said second information channel, said filtering device passing the first
beam therethrough and reflecting the second beam towards said second path, said
second path propagating the reflected second beam away from said first beam, whereby
modal disruption and losses of the optical energy entering and exiting the light circuit
15 due to alignment with other light carrying devices is reduced while minimizing an
amount of hardware and size associated with the optical network assembly.
2. The optical network assembly of claim 1, further comprising at
least three optical paths within the light circuit.
- 20 3. The optical network assembly of claim 1, further comprising a
plurality of light circuits for connecting with a plurality of optical waveguides.

4. A method for separating optical energy comprising the steps of:
forming a light circuit having a first optical path and a second
optical path;

5 propagating an optical beam having a first and a second
information channel contained therein along the first optical path towards a filtering
device;

separating the optical beam into at least two beams, a first beam
containing the first information channel and second beam containing the second
10 information channel;

passing the first beam through the filtering device and reflecting
the second beam off of the filtering device; and

15 propagating the reflected second beam along the second path
away from the first beam, whereby modal disruption and losses of the optical energy
entering and exiting the light circuit due to alignment with other light carrying devices
is reduced while an amount of hardware and size associated with the light circuit are
minimized.

20 5. The method of claim 4, further comprising the steps of:
forming additional light paths within the light circuit; and
propagating additional channels of information within the optical
beam.

25 6. The method of claim 4, further comprising the steps of:
forming a plurality of light circuits; and
connecting the plurality of light circuits with a plurality of
optical waveguides.

OPTICAL NETWORKING ASSEMBLY

ABSTRACT OF THE DISCLOSURE

5 An optical network assembly includes a planar lightguide circuit (PLC) and a filtering device. A PLC can have at least two optical paths for propagating optical energy. The PLC can be designed to channel optical energy with its optical paths towards the filtering device in order to separate the optical energy into at least two beams, where a first beam can contain a first information channel and a second beam
10 can contain a second information channel. The filtering device can be attached directly to the PLC or it can be attached directly to an optical waveguide that is also connected to the PLC. The optical waveguide can either feed optical energy to or propagate optical energy away from the PLC. Multiple optical waveguides can be attached to a PLC to feed optical energy into and away from the PLC. The PLC, filtering device,
15 and optical waveguide can form the building blocks to more complex optical network architectures.

20 K & S File No. 06948.105009

Fig. 1

CONVENTIONAL ART

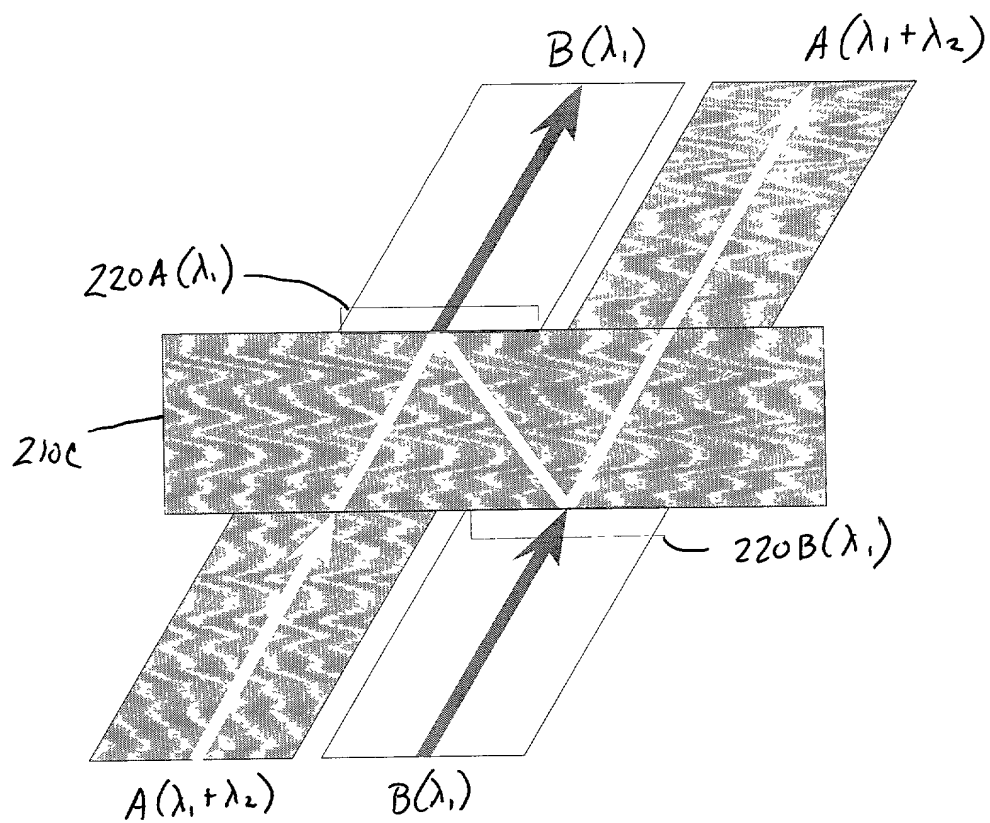


Fig. 4

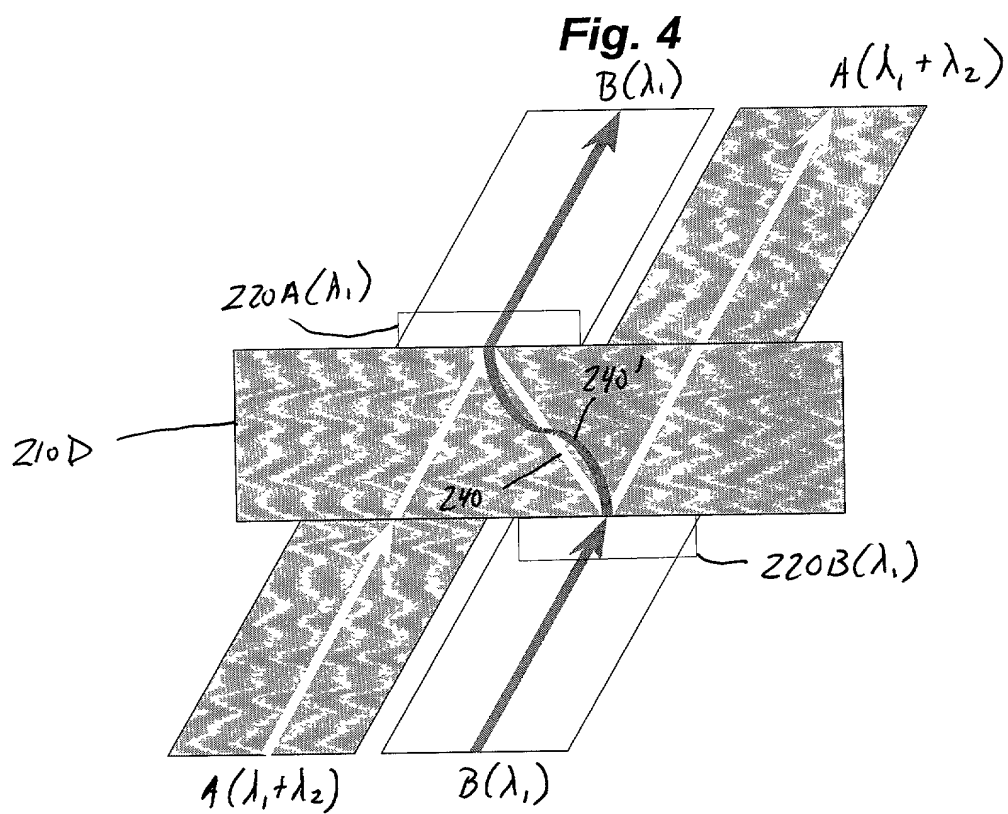


Fig. 5

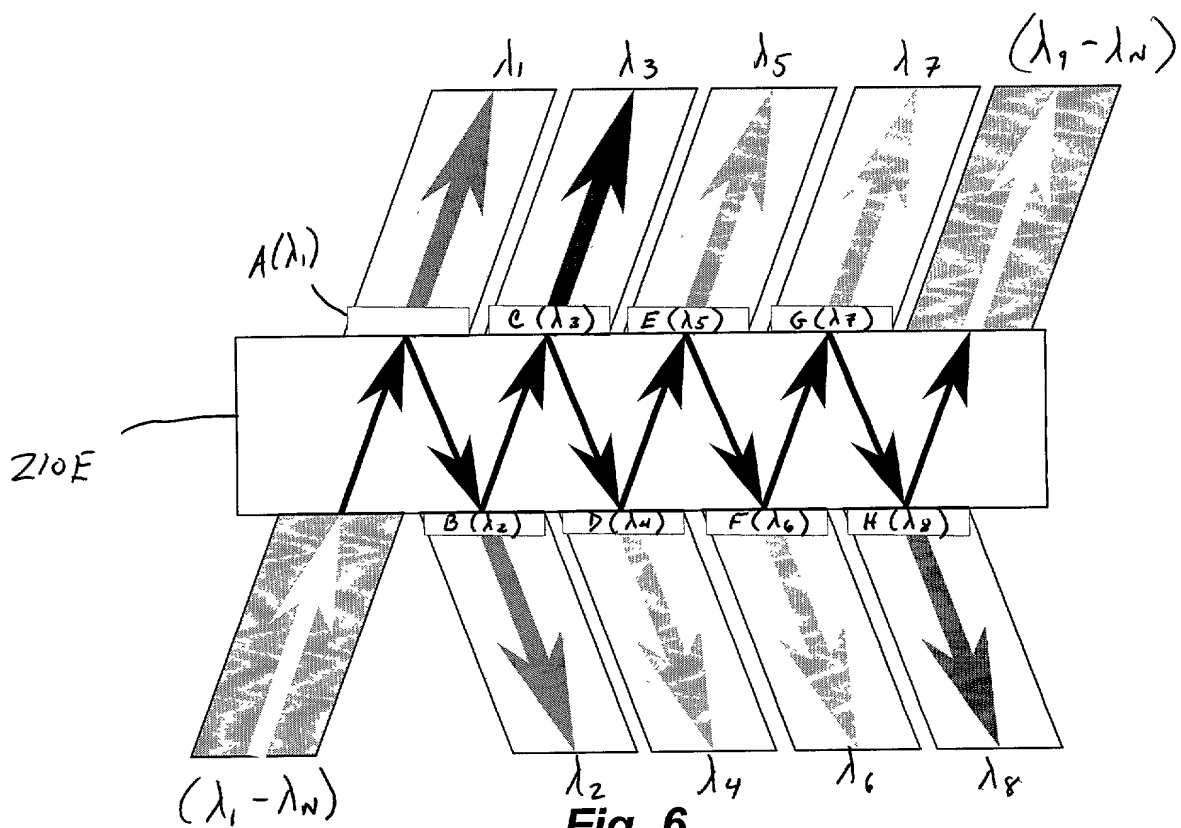


Fig. 6

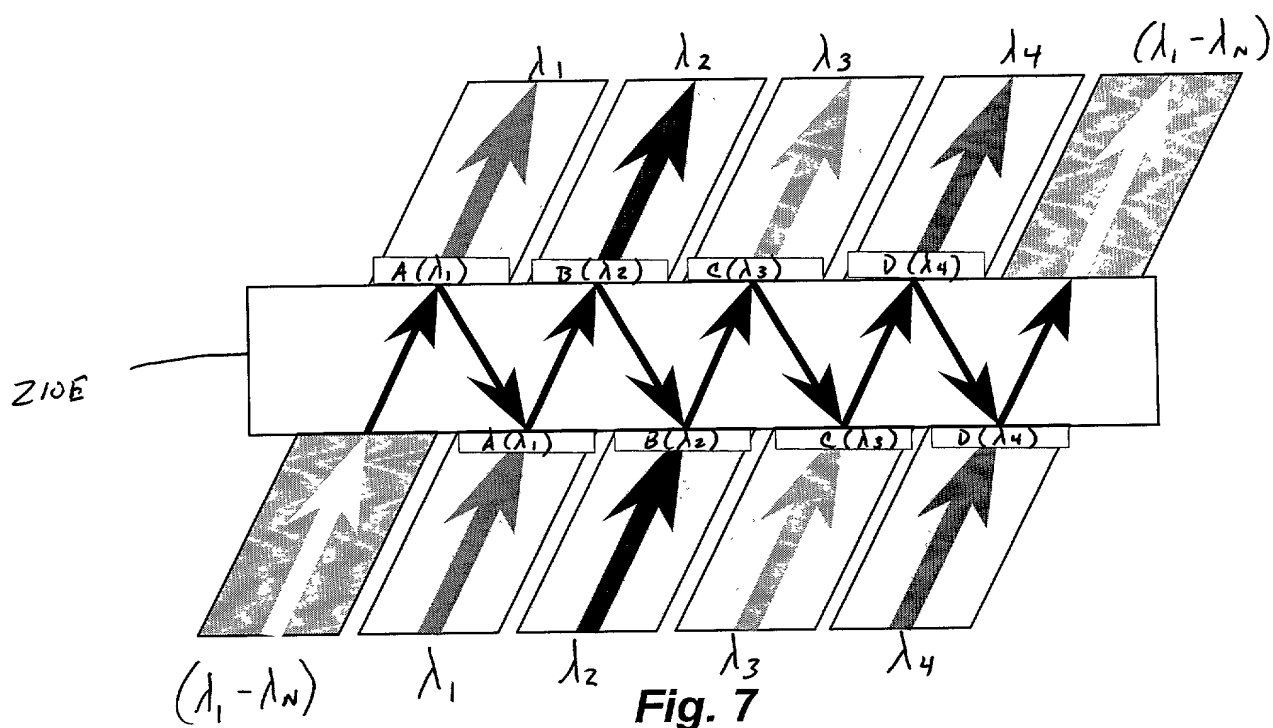


Fig. 7

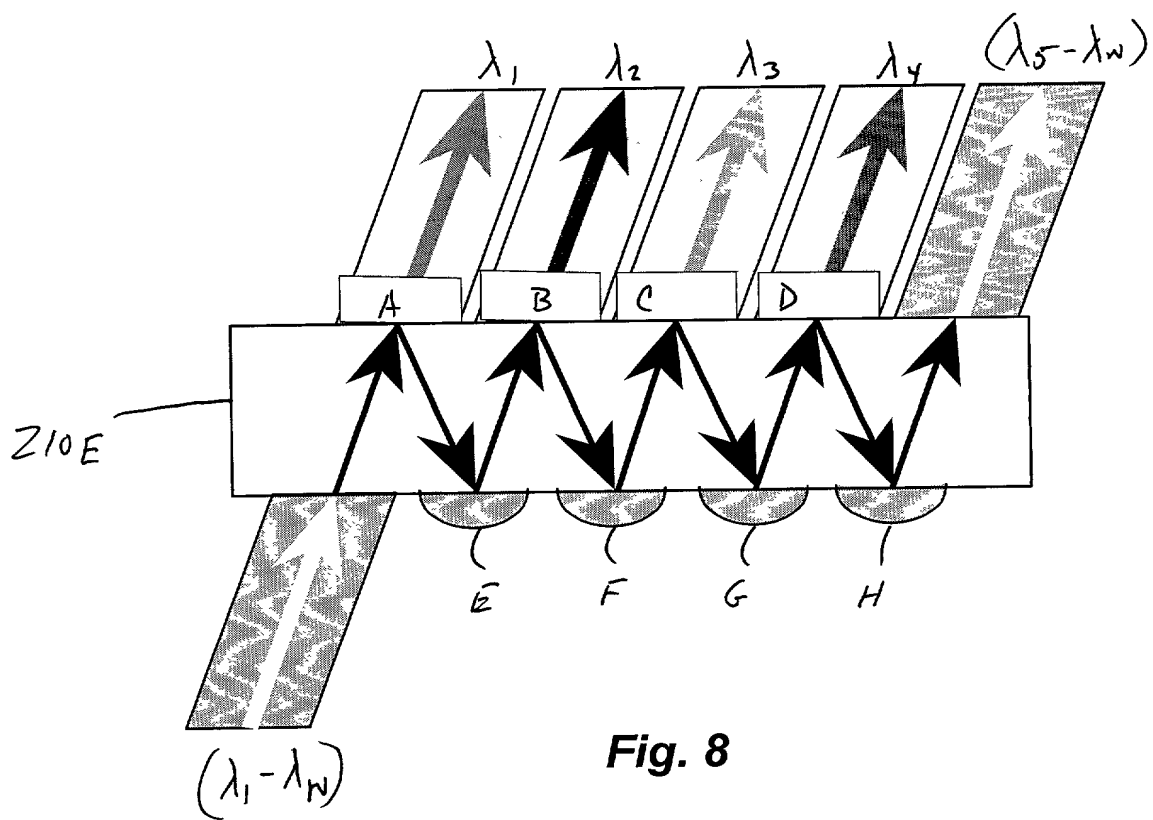


Fig. 8

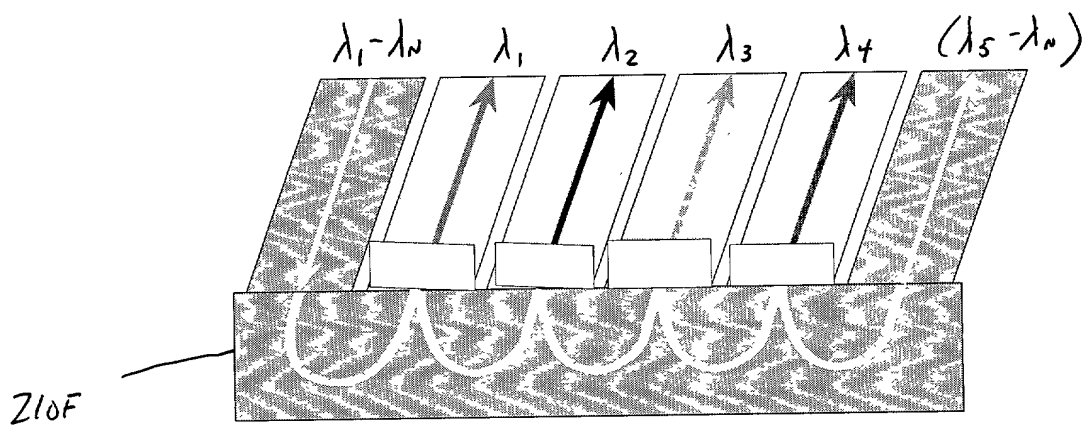


Fig. 9

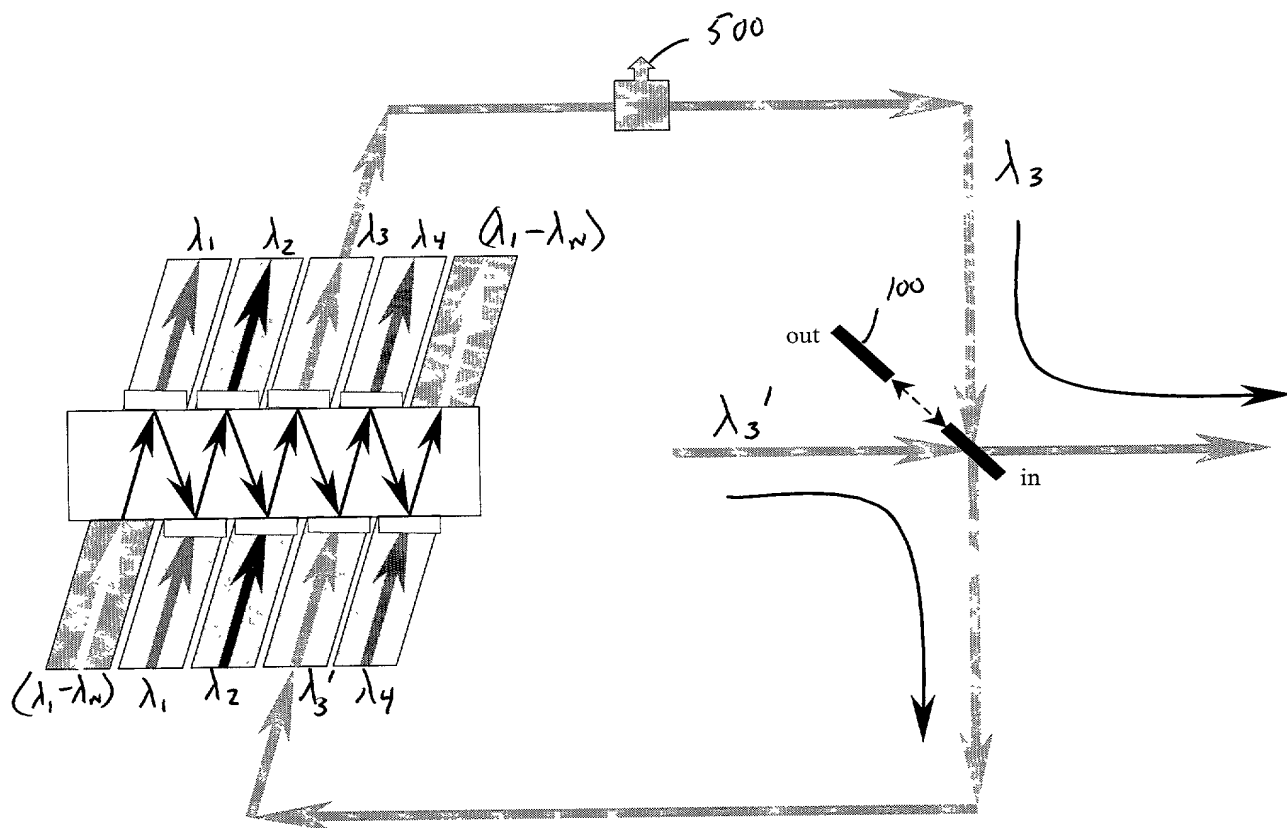


Fig. 10

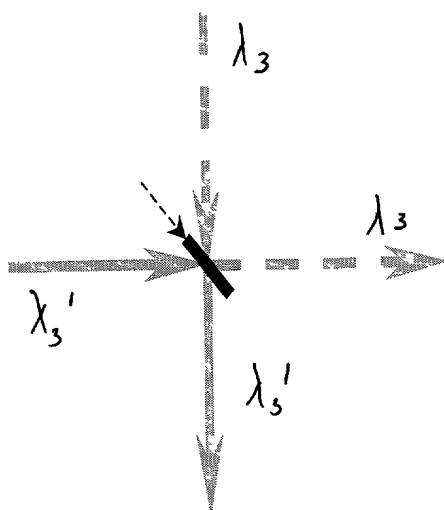


Fig. 11

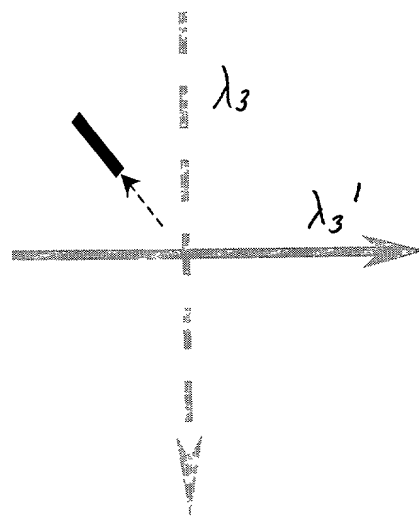


Fig. 12

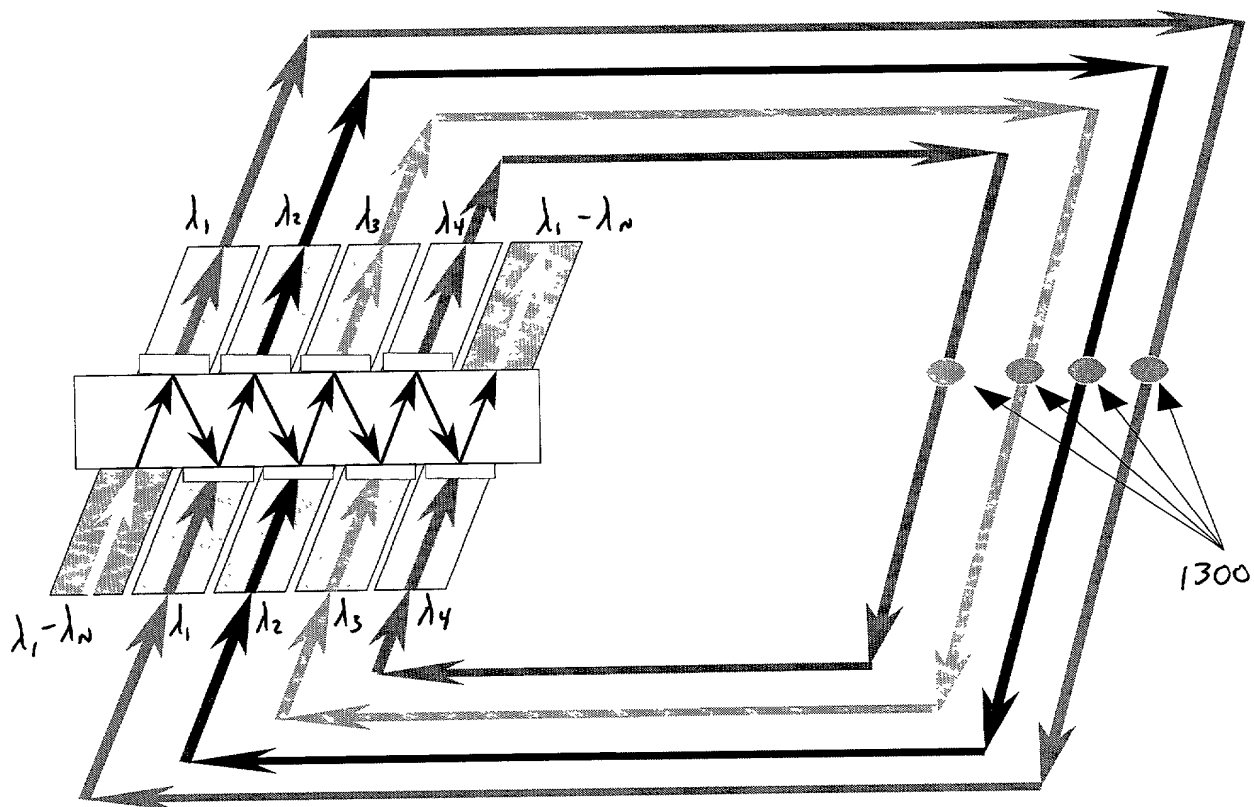


Fig. 13

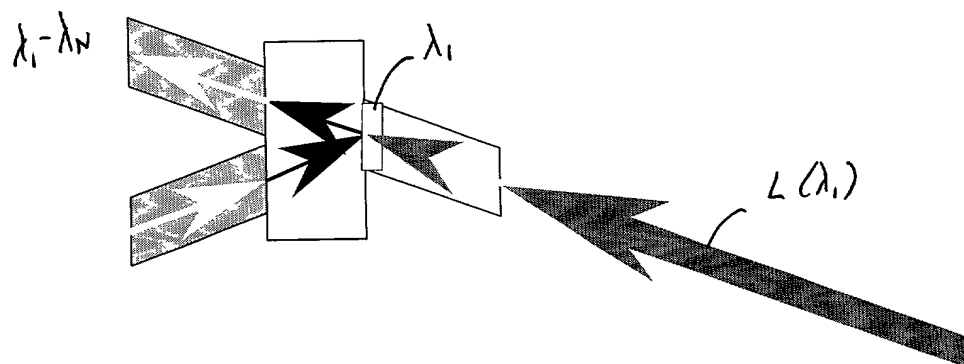


Fig. 14

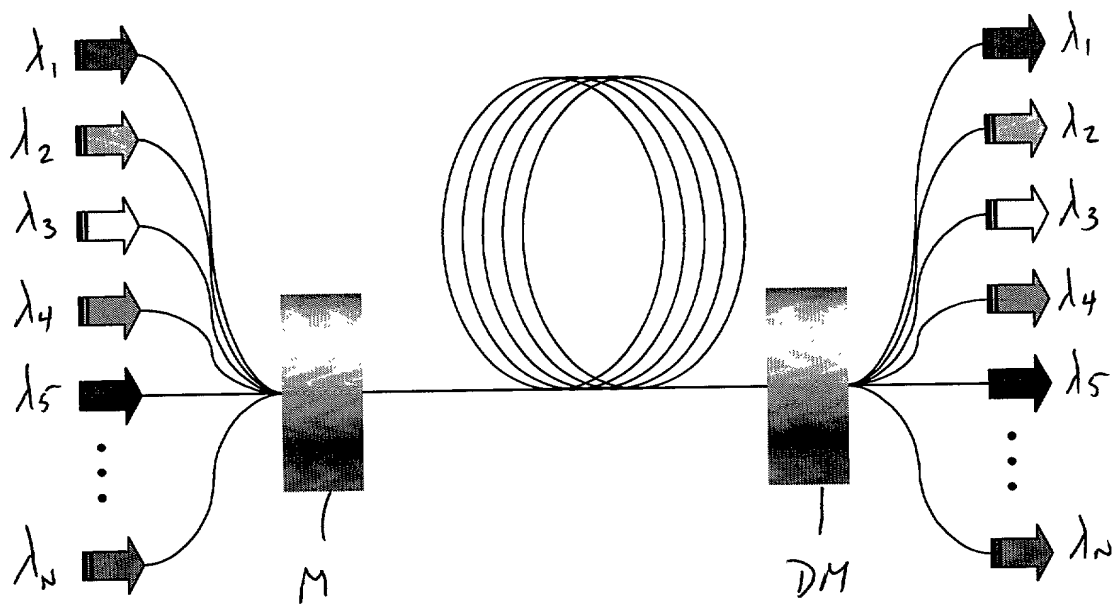


Fig. 15

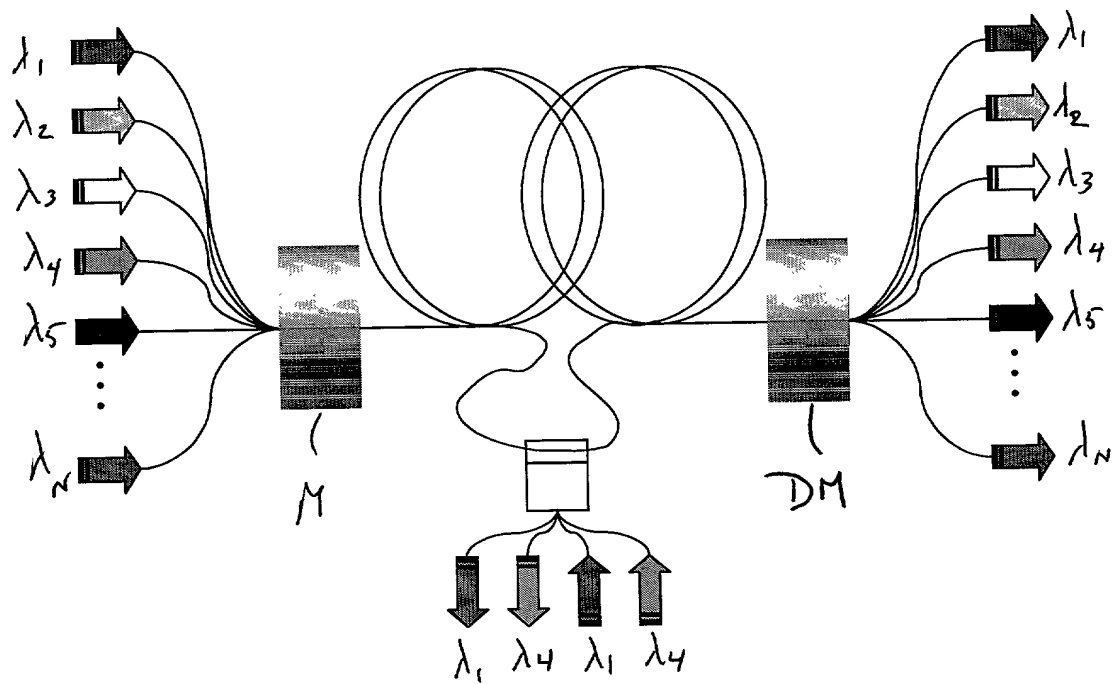


Fig. 16

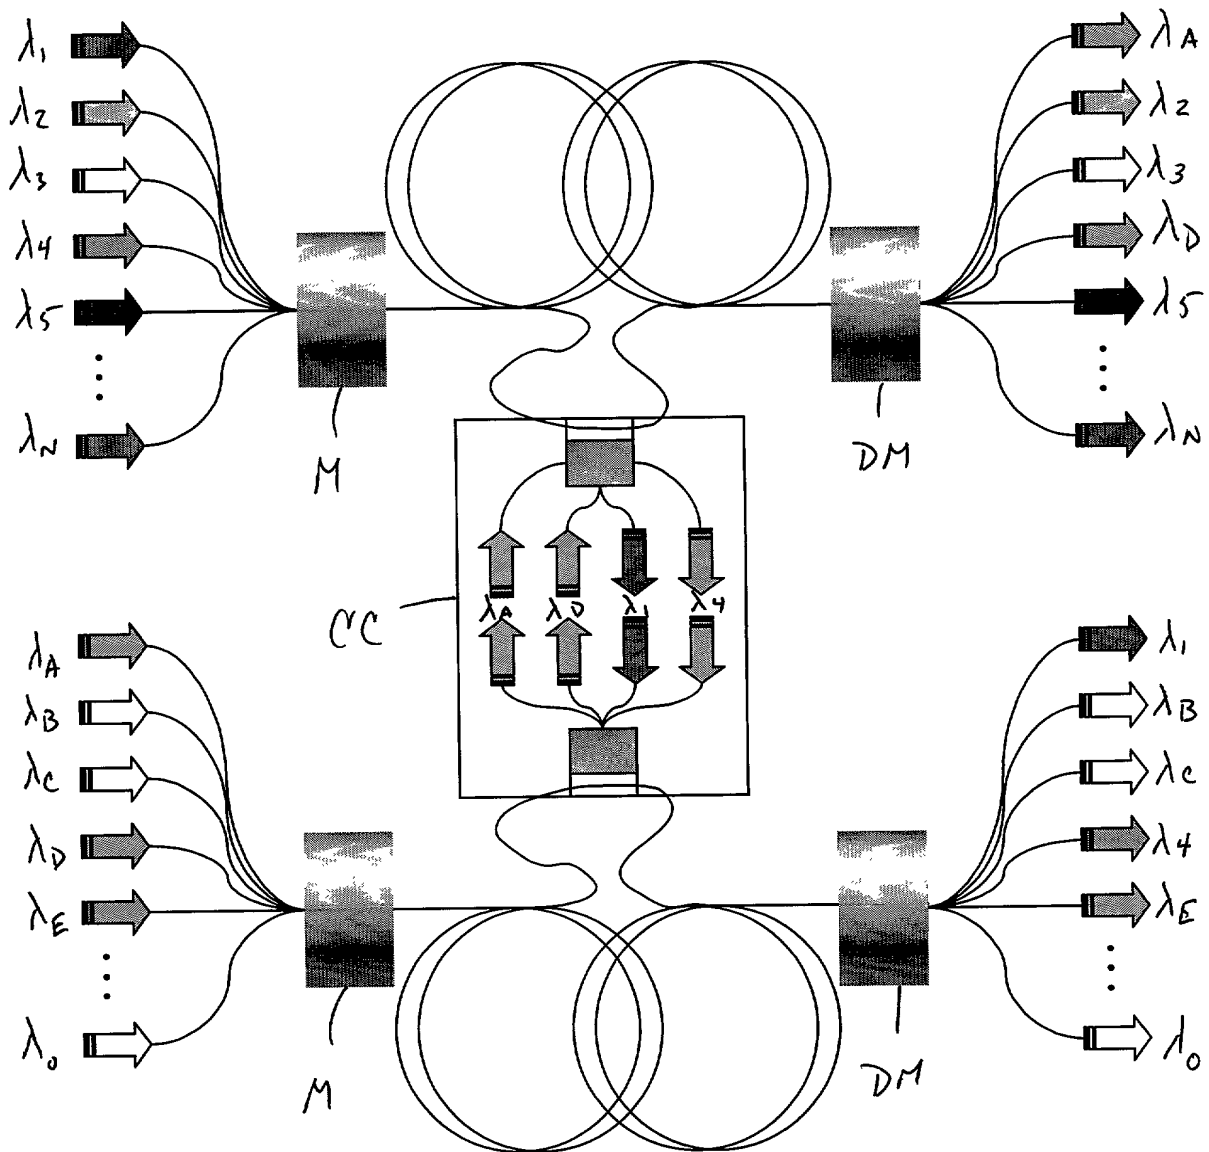


Fig. 17

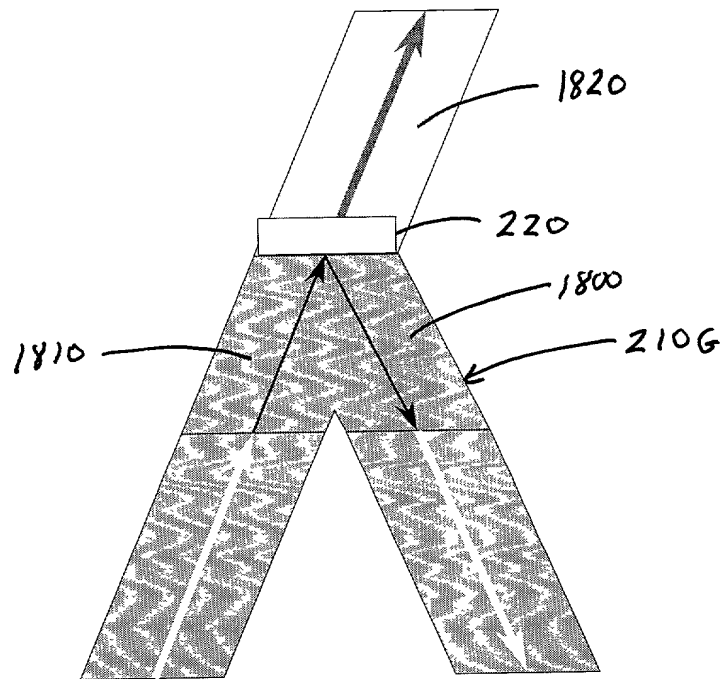


Fig. 18

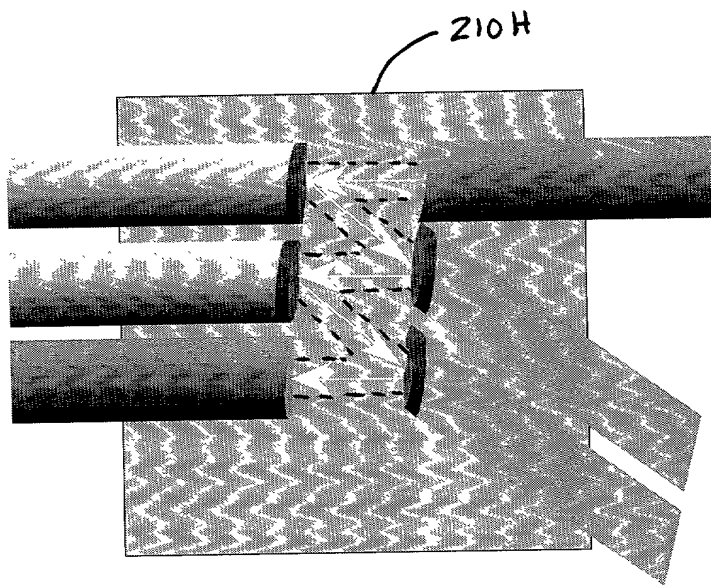


Fig. 19

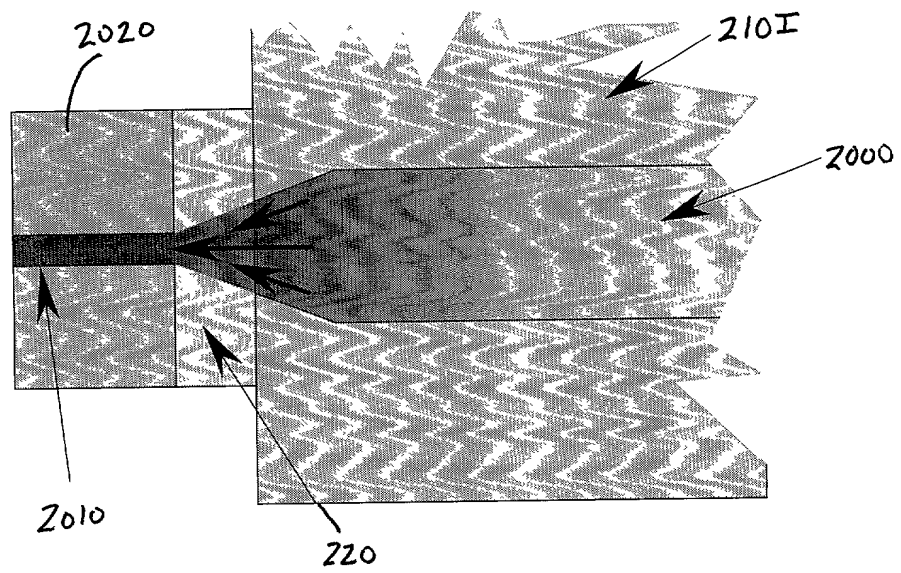


Fig. 20

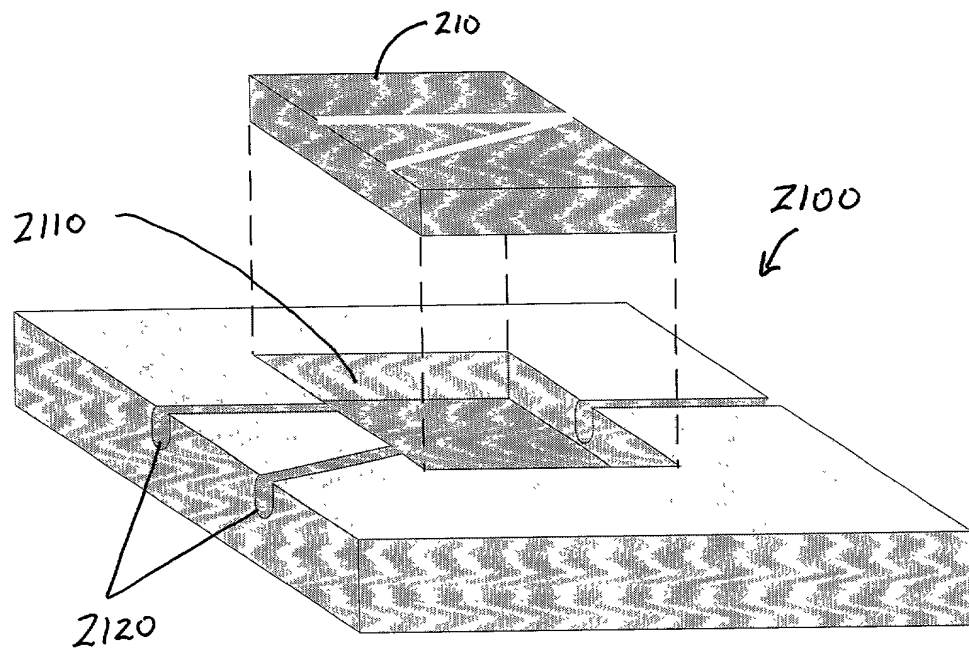


Fig. 21

FIG. 22

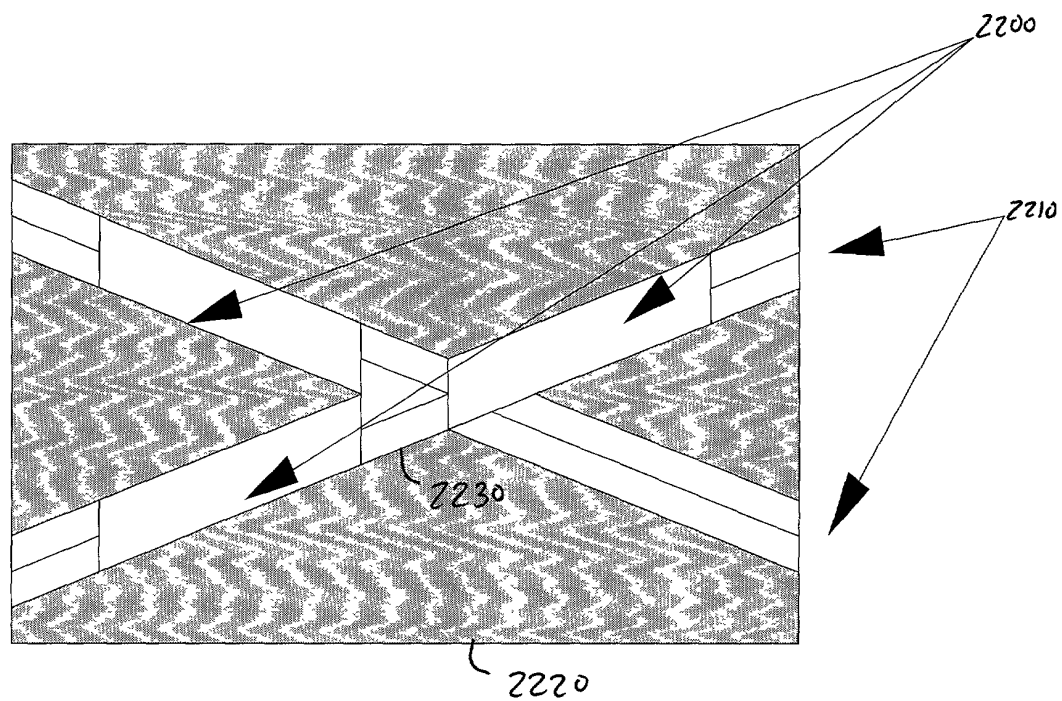


Fig. 22

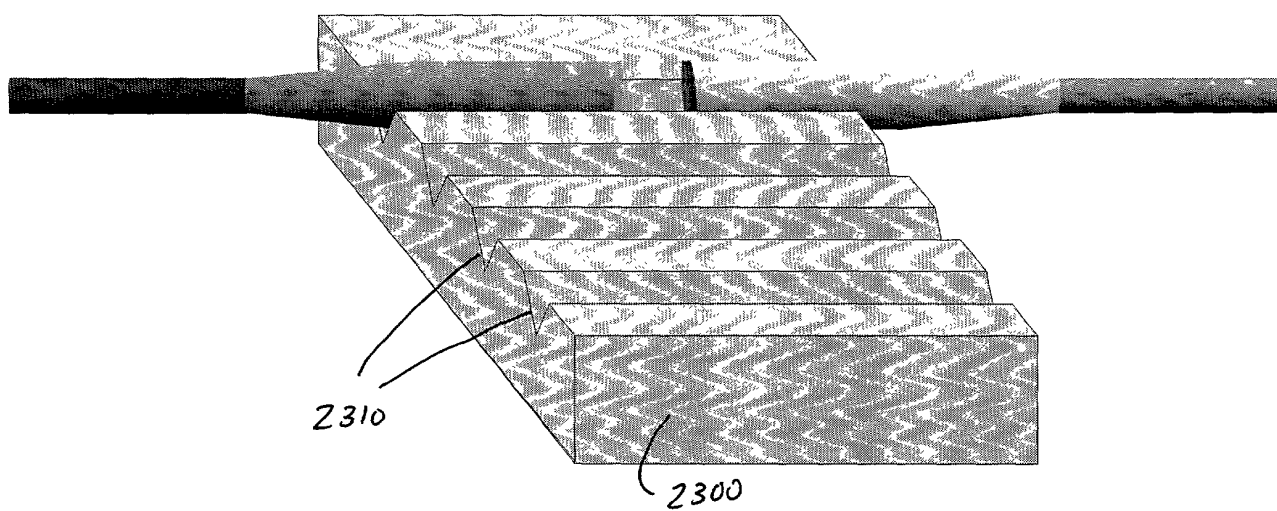


Fig. 23

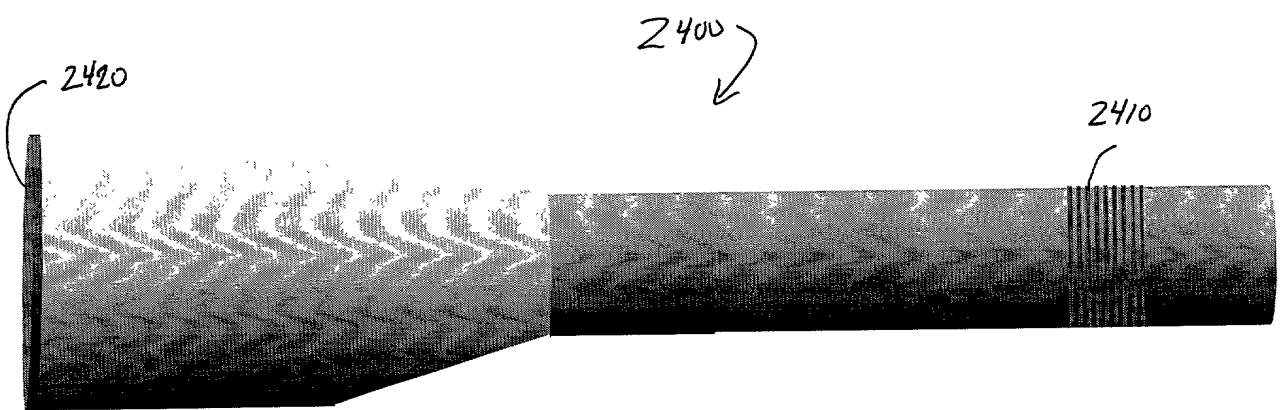


Fig. 24

DECLARATION AND POWER OF ATTORNEYAttorney's Docket No. **06948.105009**In re Application of: **Michael L. Wach**

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name. I believe I am a original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **Optical Networking Assembly**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used by others in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to the date of this application. I further state that the invention was not in public use or on sale in the United States of America more than one year prior to the date of this application. *I understand that I have a duty of candor and good faith toward the Patent and Trademark Office*, and I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of the foreign application(s) for patent or inventor's certificate listed below, and have also identified below any foreign application for patent or inventor's certificate disclosing subject matter in common with the above-identified specification and having a filing date before that of the application on which priority is claimed:

<u>Application No.</u>	<u>Country</u>	<u>Filing Date</u>	<u>Priority Claimed Under 35 USC §119</u>
None			Yes _____ No <u>X</u>

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

<u>60/124,424</u>	<u>3/15/99</u>		
(Application No.)	(Filing Date)	(Application No.)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter disclosed and claimed in the present application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status: patented, pending, abandoned</u>
None		

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statement were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patents issuing thereon.

POWER OF ATTORNEY: The following are hereby appointed to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Sherry M. Knowles-33,052; W. Scott Petty-35,645; Clark G. Sullivan-36,942; Steven P. Wigmore-40,447; Jacqueline Haley-41,457; Curtis L. Doster-41,714; W. Wayt King Jr.-42,739; Charles Vorndran-45,315.

Send correspondence to: **King & Spalding**
191 Peachtree Street, N.E., 45th Floor
Atlanta, Georgia 30303

Direct telephone calls at **(404) 572-4600**

Steven P. Wigmore

Full name of sole inventor: Michael L. Wach	Citizenship: USA
Inventor's signature	Date:
Residence and Post Office Address: 914 Collier Road, N.W., #6005, Atlanta, Georgia 30318	